

4K/60Hz HDMI Distribution Amplifier

4K60
4:4:4

HDMI 2.0


EDID
management

HDCP
2.3

- Distribute one UltraHD/4K source to 2/4/8 HDMI displays
- HDMI 1.4/2.0 compliant and 18Gbps bandwidth
- HDCP 1.4/2.2/2.3 compliant
- Support 4K resolutions up to UHD (3840 x 2160) and DCI (4096 x 2160) with refresh rates of 60 Hz (4:4:4)
- Support Dolby Digital/DTS-HD/Dolby TrueHD Audio
- The EDID accesses data from OUTPUT 1 when connected
- Support CEC function (OUTPUT1)



◆ Diagram

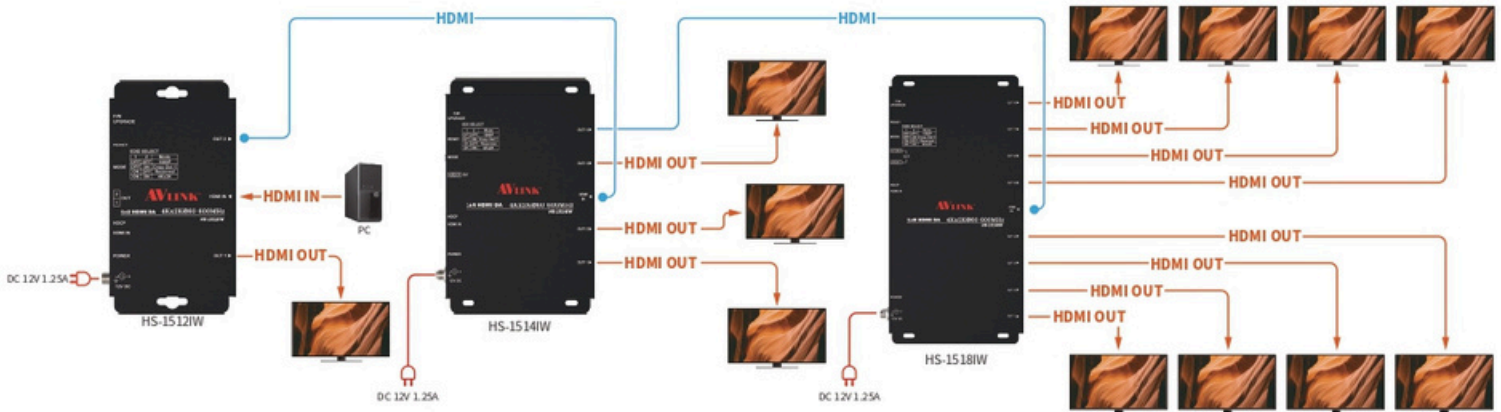

◆ Specifications

Product Name	HS-1512IW	HS-1514IW	HS-1518IW
Max. Resolution	Support 4K resolutions up to UHD (3840 x 2160) and DCI (4096 x 2160) with refresh rates of 60 Hz (4:4:4)		
HDCP version	HDCP 2.3 (Backward Compatible)		
Cable Distance (Device to Monitor)	10M (Max.)		
Signal Type	Standard HDMI Signal		
HDMI Input Connector (A-Type Female)	1		
HDMI Output Connector (A-Type Female)	2	4	8
CEC	YES		
Power Adapter (Min.)	DC 12V 1.25A (Locking Jack)		
Power Consumption	1.92W (Max.) 0.72W (Stand by)	2.16W (Max.) 0.72W (Stand by)	6.24W (Max.) 0.84W (Stand by)
Housing	Metal		
Net Weight	270g	450g	646g
Dimensions (L x W x H)	150 x 80 x 25 mm	171 x 120 x 25 mm	240 x 120 x 25 mm